BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Estimate Cost Rs. 19.50Lakhs

Name of Work:-Construction of drains and culverts in Escort layout 1st and 7th main road inAttur ward no-03 of Ynk Satellite Town SubDivision

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300-1,Earth work excavation by manual means in ordinary soil invlving an average horizontal throw up to 2 meters and an average lift uo to 1.5m,excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications(Item no19.1,Page no138,PWD SR 2014-15)	Cum							
	Desilting of drains:-6th B main		2	60.00	0.50	0.35	21.00		
	6th C main		2	60.00	0.50	0.30	18.00		
	7th A main		2	175.00	0.50	0.35	61.25		
	Berm cutting:-6th A main		2	170.00	0.60	0.20	40.80		
	6th B main		2	60.00	1.00	0.20	24.00		
	6th C main		2	60.00	0.80	0.15	14.40		
	7th A main		2	175.00	0.90	0.20	63.00		
							242.45	75.60	18329.22
	Basic Rate	70.00							
	Area Weightage @ 8%	5.60							
	Total	75.60							
2	Removing B.S slab of drain and stacking	sqm							
	6th B main		2	60.00	1.65		198.00		
	6th C main		2	60.00	1.65		198.00		
	7th A main		2	175.00	1.65		577.50		
							973.50		
		Deduct 30%of Missing slabs qty					292.05		
							681.45	58.32	39742.00
	Basic Rate	54.00							
	Area Weightage @ 8%	4.32							
	Total	58.32							
3	Refixing stone slabs of drains and pointing in CM(1:3)	Sqm							
			Vide Item No. 2				681.45	75.60	51518.00
	Basic Rate	70.00							
	Area Weightage @ 8%	5.60							
	Total	75.60							

4	Providing granite slabs of selected quality roughly dressed and fixed in cement mortar (1:6) including fixing curing etc., complete **do 7.5 cms** thick	sqm							
		30%of Missing slabs qty					292.05	639.36	186725.09
	Basic Rate	592.00							
	Area Weightage @ 8%	47.36							
	Total	639.36							
5	KSRB 2-2.2 : Earth work excavation for foundation of buildings, water supply, sanitary lines and electrical conduits either in pits or in trenches 1.5m and above in width, in hard soil not exceeding 1.5m , in depth including dressing the bottom and sides of pits and trenches, stacking the excavated soil clear from edges of excavation with lead upto 50m. specification, specification, No. KBS 2.1(b) / 2.3.5, No. 5/ Item No. 2.4/ PWD SR 2014-15	Cum							
	Culverts		2	7.50	1.50	1.00	22.50		
	Drain		1	60.00	1.00	0.90	54.00		
							76.50	264.60	20242.00
	Basic Rate	245.00							
	Area Weightage @ 8%	19.60							
	Total	264.60							
6	KSRRB M100-1 Loading and un loading of stone boulder/Stone aggregates/sand/kanker/Moorum.KSRRB M100-1:Placing tipper at loading point,loading with front end loader,dumping,turning for return trip,excluding time for haulage and return trip complete as per specifications(Item no17.1,Page no130 PWD SR 2014-15)	Cum							
			Vide Item No. 1+4				318.95	68.04	21701.00
	Basic Rate	63.00							
	Area Weightage @ 8%	5.04							
	Total	68.04							

7	KSRB 4-1.3:Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @180kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @0.57cum machine mixed,machine mixed,concrete laid in layers not exeeding 15cms.thick, well compacted in foundation,including cost of all materials,labour,HOM of machinery,curing complete as per specifications.Specification no KBS4.1,4.2(Item no4.3,Page no12,PWD SR 2014-15)	Cum							
	Culverts		2	7.50	1.50	0.15	3.38		
	Drain		1	60.00	0.90	0.15	8.10		
							11.48	4847.04	55620.00
	Basic Rate	4488.00							
	Area Weightage @ 8%	359.04							
	Total	4847.04							
8	KSRB 4.2.2 : Providing and laying in position Reinforced cement concrete of design mix M20 with OPC cement @ 320kgs, with 20mm and down size graded granite metal coarse aggregates @0.69cum and fine aggregates @0.460cum with superplastesisre @ 3lts conforming etc as per specification&direction of the engineer incharge of work(pwd sr2014-15,p.no13,sno4.11)	Cum							
	For culvert bottom		2	7.50	1.00	0.20	3.00		
	Side walls		4	7.50	0.20	0.70	4.20		
	For deck slab		2	7.50	1.00	0.23	3.45		
	Drain		1	60.00	0.80	0.15	7.20		
	Side walls		2	60.00	0.15	0.70	12.60		
							30.45	6065.28	184688.00
	Basic rate	5616.00							
	Add 8% AW	449.28							
	Total	6065.28							

9	KSRB 4.9.2: Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per specifications.Specification noKBS 4.6.3.TMT bars Fe550(pwd sr2014-15,p.no17,s.no4.46)	Qtl							
	90 kg / cum						27.41	7905.60	216653.00
	Basic rate	7320.00							
	Add 8% AW	585.60							
	Total	7905.60							
10	KSRB 4-6.4 : Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for vertical surface such as walls at any thickness, attached pilasters,bittresses,buttresses plinth and string course including cost of all materials,labour complete asperspecificationS.Specification no.KBS 4.6.2(pwd sr2014-15,p.no15/4.31)	Sqm							
	Side walls		8	7.50		0.70	42.00		
	Deck slab		2	7.50	0.60		9.00		
	Drain side walls		4	60.00		0.70	168.00		
	Basic rate	271.00					219.00	292.68	64097.00
	Add 8% AW	21.68							
	Total	292.68							
11	KSRB 5-14: Providing and constructing precast concrete solid blocks with compressive strength not less than 35Kg/sqm with cement mortar 1:4 masonry (quoin, Jamb, closer blocks) with solid concrete blocks of size 40x20x20cms conforming to I.S: 2185/1985 in superstructure including cost of materials, labour charges, scaffolding, curing complete as per specifications. (P25/5.27)	Sqm							
	Load bearing wall for 6th B main		2	60.00		0.20	24.00		
	6th C main		2	60.00		0.20	24.00		
	7th A main		2	175.00		0.20	70.00		
							118.00	993.60	117245.00

	Basic Rate	920.00							
	Area Weightage @ 8%	73.60							
	Total	993.60							
12	KSRB 5-15: Providing and constructing Non load bearing wall with cement concrete solid blocks with compressive strength not less than 35Kg/sqm with cement mortar 1:4 masonry (quoin, Jamb, closer blocks) with solid concrete blocks of size 40x10x20cms conforming to I.S: 2185/1965 in superstructure including cost of materials, labour charges, scaffolding, curing complete as per specifications. (P25/5.28)	Sqm							
	Non load bearing wall for 6th B main		2	60.00		0.20	24.00		
	6th C main		2	60.00		0.20	24.00		
	7th A main		2	175.00		0.20	70.00		
							118.00	724.68	85512.00
	Basic Rate	671.00							
	Area Weightage @ 8%	53.68							
	Total	724.68							
13	KSRRB 4.1:6Providing and laying in position plain **cement concrete mix 1:2:4** with cement @240kgs,with 20mm and down size graded granite metal coarse aggregates @0.69 cum and fine aggregates @0.459cum, machine mixed, concrete laid in layers not exceeding 15cms thick well compacted,in foundation,plinth and cills,including cost of all materials, labour, HOM of machineries, curing complete as per specifications.Specification no4.1,4.2 **(Page.12 & Item No. 4.6)**								
	Flagging coarse bottom for 6th B main		2	60.00	0.25	0.10	3.00		
	6th C main		2	60.00	0.25	0.10	3.00		
	7th A main		2	175.00	0.25	0.10	8.75		
	Load bearing wall coping for 6th B main		2	60.00	0.20	0.05	1.20		
	6th C main		2	60.00	0.20	0.05	1.20		
	7th A main		2	175.00	0.20	0.05	3.50		
	Non load bearing wall coping for 6th B main		2	60.00	0.10	0.05	0.60		
	6th C main		2	60.00	0.10	0.05	0.60		
	7th A main		2	175.00	0.10	0.05	1.75		
	Approached concrete for culverts		4	7.00	0.50	0.15	2.10		
							25.70	5327.64	136920.35
	Basic Rate	4933.00							

	Area Weightage @ 8%	394.64							
	Total	5327.64							
14	Providing and fixing Precast RCC Slabs as Per approved design, specification and Direction Engineer-in-Charge. (Approved Data Rate).	Sqm							
	6th B main		2	60.00	0.90		108.00		
	6th C main		2	60.00	0.90		108.00		
	7th A main		2	175.00	0.90		315.00		
	Drain		1	95.00	0.75		71.25		
							602.25	1245.00	749801.25
15	Miscellaneous charges	L/S							1206.09
								Total RS	**1950000.00**
(Rupees Nineteen lakh fifty thousand only)									

Certificate

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per C.S.R. of 2014-15
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
Ward no: 03

Assistant Executive Engineer
Yelahanka New town Sub Division
Bangalore-64

Executive Engineer
Yelahanka Division
Bangalore-64

Administrative Sanction for Rs. 19-50 lakhs
Nineteen Lakh & Fifty Thousand only
is accorded under head P-1771 2014-15
Registered as CE No: ..... Subject to conditions contained in enclosed memo No. CE/YNE/AA/52/14-15 Dt. 27-10-14

AEJE TA CE(YNK)

TECHNICALLY SANCTIONED FOR Rs 19-50 lakhs
Rupees Nineteen Lakh & Fifty Thousand only
Under P-1771 2014-15
Registered as CE ( ) No: ..... Subject to conditions contained in enclosed memo EE ( ) No: ..... Dt: ..... Estimate AA Sanctioned No. CE/YNE/TS/714/14-15 Dated 28.10.14 Rs. 19-50 lakhs

Executive Engineer

Name of work :- Construction of drains and Culverts in ESCort layout 1st to 7th cross road in Attur ward no-03.

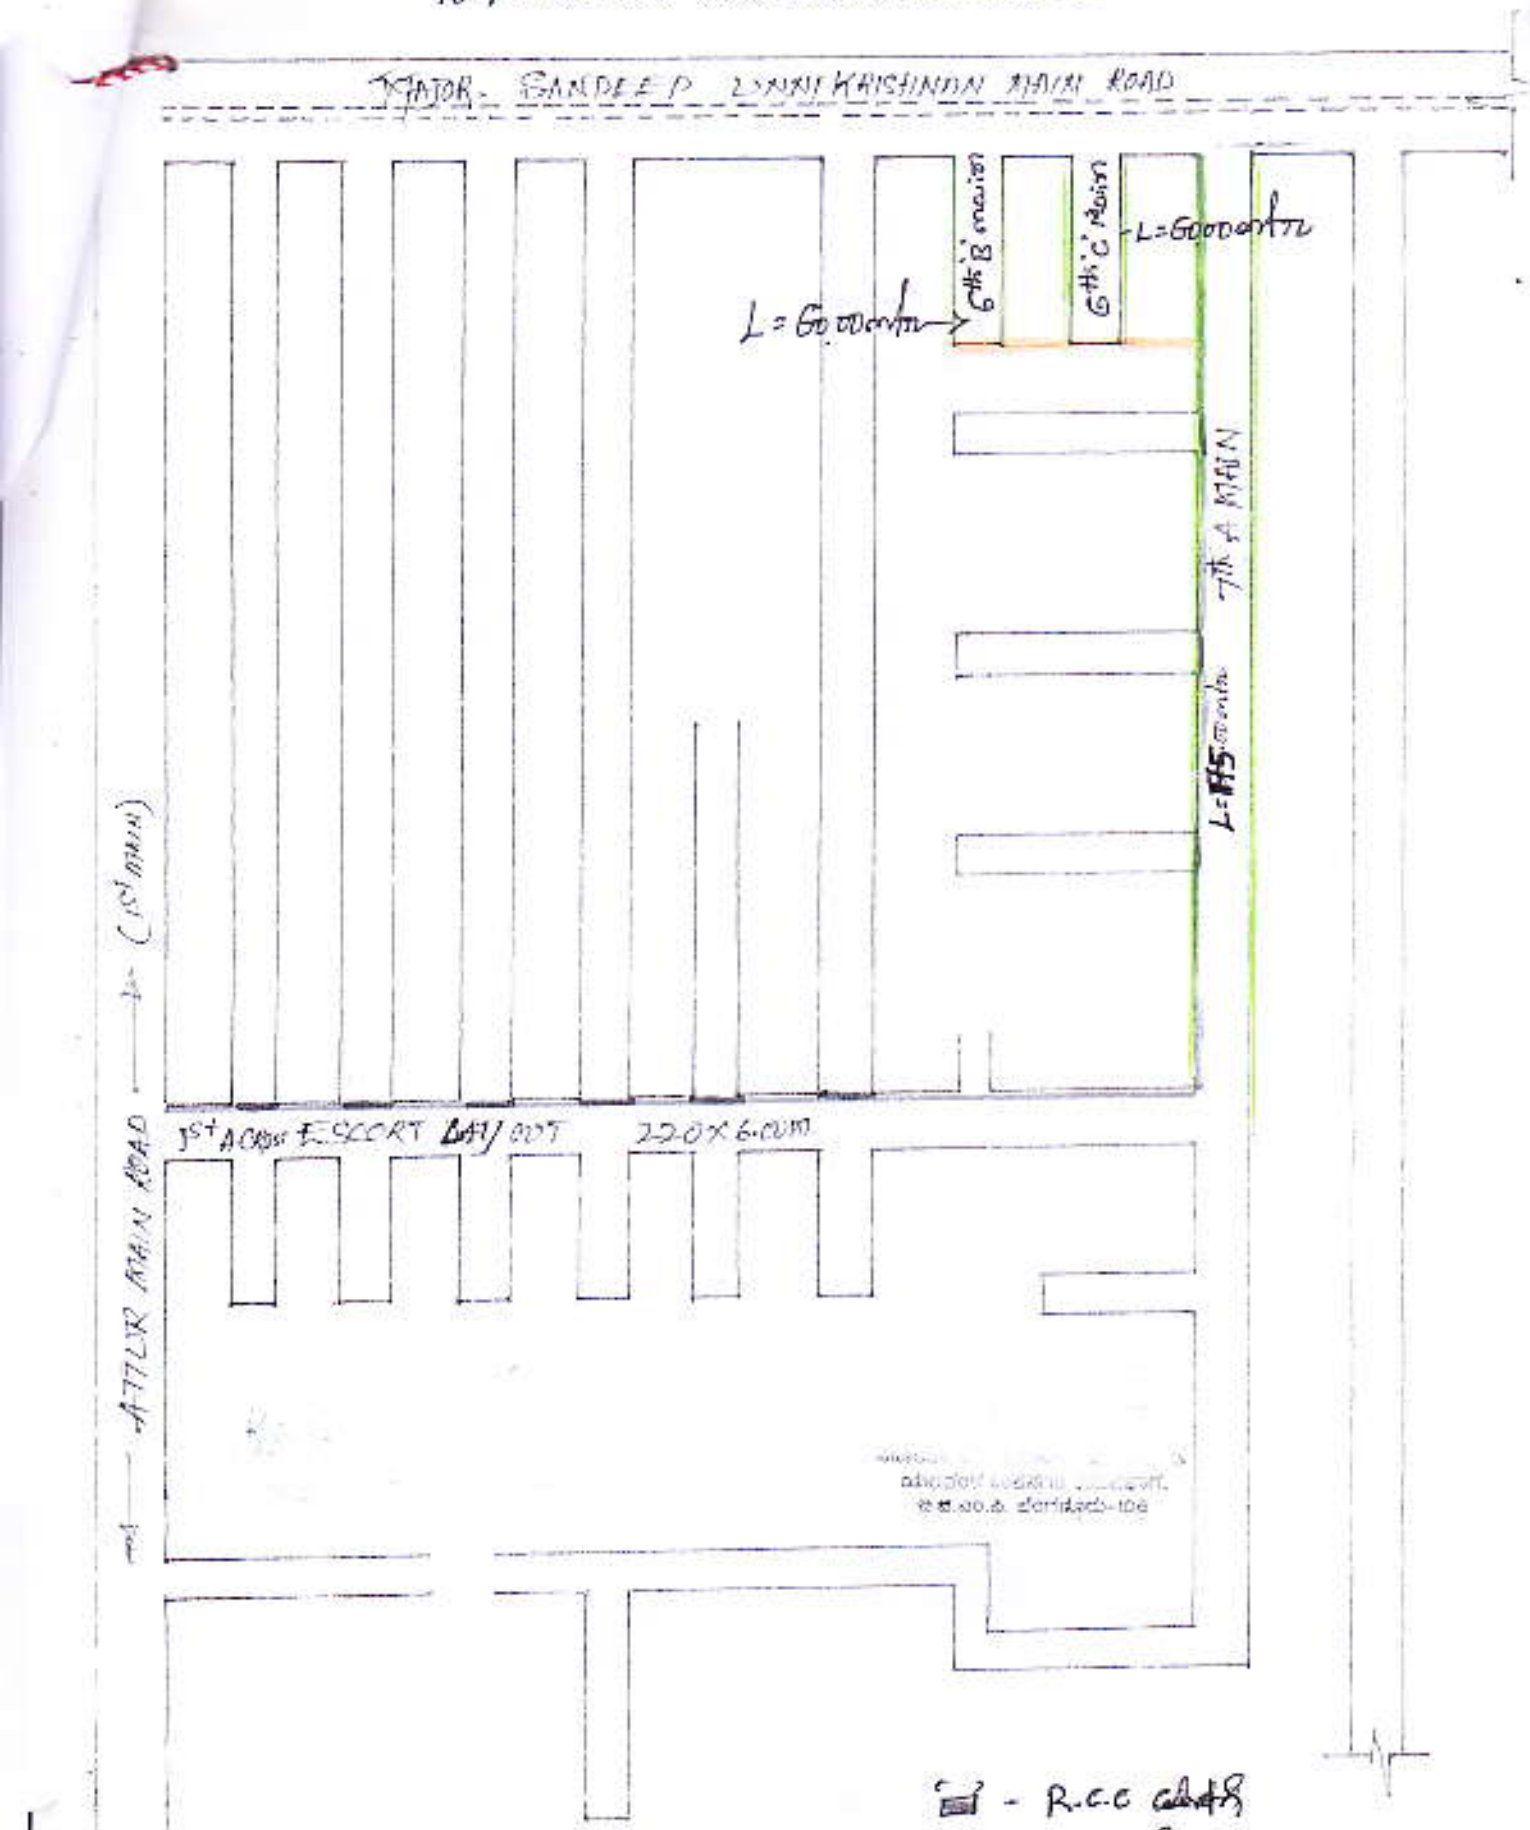

B.M. Pradeep

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಯಲಹಂಕ ಉಪನಗರ ಉಪವಿಭಾಗ,
ಬ.ಬ.ಎಂ.ಪಿ. ಬೆಂಗಳೂರು-106